



FX87

DWDM Tunable Laser Source

Tunable C-band laser source is used to test, install and commission multi-wavelength DWDM networks. Verify wavelength routing and troubleshoot passive DWDM network elements. Optimized for Fiber Deep, Metro and Core DWDM test applications.



Key Features

- Affordable, hand held tunable DWDM laser source
- Fast boot-up time and laser stabilization (< 5 seconds)
- Full C-band tuning (> 80 channels @ 50 GHz spacing)
- Selectable Channel spacing: 50, 100 & 200 GHz
- Source modulation - 270Hz, 330Hz, 1kHz & 2kHz
- Broadband Optical Power Meter (OPM) option
- WaveID - OPM automatically identifies each wavelength transmitted by the tunable source or companion device
- Monochrome LCM, 128 x 64 pixels, LED backlight display
- Li-Polymer rechargeable battery, > 10 hours operation
- Non-volatile storage for > 900 measurements
- Wired transfer of saved OPM results to a PC via USB cable
- Wireless transfer of saved OPM results to a PC via Bluetooth (optional)
- LT-Sync PC software for OPM result transfer and basic report generation.
- Fiberizer Desktop Plus PC software for advanced report generation
- Upload of stored results to VeEX R-Server workforce management system or Fiberizer Cloud via PC software
- Rugged Polycarbonate Case with impact resistant rubber boot, 1 meter drop tested
- Splash and dust resistant keypad

Key Specifications

Tunable Source

- Wavelength Range: 1527.60 to 1566.31 nm
- Frequency Range: 191.40 to 196.25 THz
- 97 Channels
- Minimum channel spacing: 50 GHz (ITU G.694.1 grid)
- Linewidth: 500 kHz
- SMSR: 40 dB minimum
- Built-in wavelength locker (stable to within ± 2.5 GHz)
- Output Power: + 5 dBm (typ)
- Laser Safety: Class 1M per IEC 60825-1:2014

Optical Power Meter (Optional)


- Accuracy: ± 0.2 dB (5%)
- WaveID support (using compatible VeEX source)
- Display resolution: 0.01 dB
- Measurement range:
 - Standard (PM1) version: -65 to +10 dBm
 - High (PM2) version: -50 to +25 dBm

Fiberizer™ Software

Fiberizer Software is a family of fiber software suites that dramatically increases technician efficiency, workflow integration and process compliance. LT-Sync software is used to transfer OPM test results from the FX87 to a PC. LT-Sync software also supports upload of test results to Fiberizer Cloud, R300 server or Fiberizer Desktop Plus for post processing and report generation.

Fiberizer Cloud lets you store, analyze and access all your fiber optic test data in a single online repository. This unique Enterprise or Cloud based solution provides superior centralized test data management – plus being a full online web service, technicians can work or access data from almost any location, at any time.

Fiberizer Desktop-Plus software enables comprehensive test data analysis and report generation on Windows compatible PC platforms. The software also supports upload of test data to Fiberizer Cloud or VeSion R300 server for offsite record keeping and report generation.

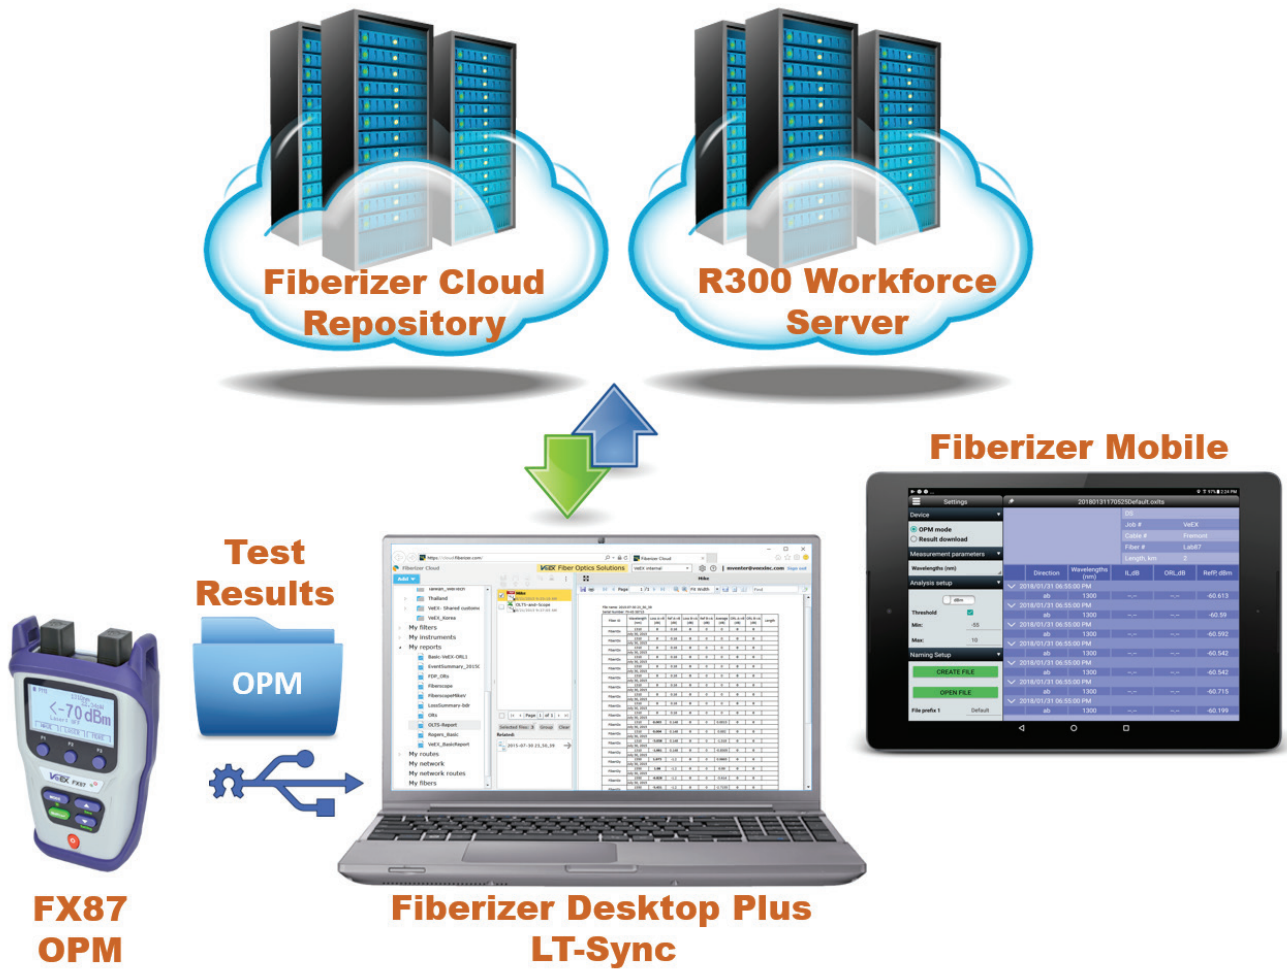

VeSion R300 Productivity Server

A software application is specifically designed for medium-to-large service providers facing the enormous challenge of managing and coordinating hundreds of installations per day, collecting the field test results for billing/record purposes and having to maintain a large inventory of test sets. When used in conjunction with Fiberizer™ Mobile, the back-office server application becomes a powerful tool to reduce customer call-backs and associated truck rolls, maximizing workforce efficiency and lowering operational costs.

Optical Specifications¹

| Tunable Laser Source (TLS) | Specification |
|---|--|
| Wavelength Range (nm) | 1527.60 to 1566.31 |
| Frequency Range (THz) | 191.40 to 196.25 |
| Frequency Accuracy (GHz) | ±2.5 |
| Number of Channels ² | 97 |
| Channel # | 14-62 |
| Linewidth (kHz) ³ | 500 |
| OSNR (dB) ⁴ | 55 |
| SMSR (dB) | 40 |
| Minimum channel spacing (GHz) | 50 |
| Internal Wavelength Stabilization (GHz) | ±2.5 |
| Output Power (dBm) | +5 |
| Modulation (Hz) | 270/330/1000/2000 |
| Laser Safety (IEC 60825-1:2014) | Class 1M |
| Interface | APC |
| Connector Type | Fixed SC |
| Broadband Power Meter (Optional) | |
| Wavelength range (nm) | 850 to 1650 |
| Calibrated wavelengths (regular OPM mode) | 850/1310/1490/1550/1590/1610/1625/1650 |
| Calibrated wavelengths (DWDM WaveID) | 1530 to 1560 nm in 10 nm steps |
| Power measurement range (dBm) | |
| -Standard (PM1) | -65 to +10 |
| -High (PM2) | -50 to +25 |
| Power measurement accuracy %, (dB) ⁵ | ± 5, (0.22) |
| Tone detection (Hz) | 270/330/1000/2000 |
| Wave ID (Auto) | Compatible with VeEX Light source |
| Optical adaptors (interchangeable) | SC, FC, LC, Universal 1.25 & 2.5 mm |

Notes:

1. At specified operating temperature
2. Consecutive channels at 50 GHz spacing
3. Intrinsic Lorentzian linewidth
4. In a 0.1 nm wide band
5. At calibrated wavelengths



General Specifications

| | | | |
|---------------|---|-----------------|--|
| Size: | 164.39 x 100 x 46.93 mm (H x W x D) | PC connection: | Micro USB, data transfer via PC software Bluetooth optional |
| Weight: | < 400 g (< 0.7 lbs.) | Display: | Monochrome LCD with backlight |
| Construction: | Rugged, Polycarbonate chassis, 1 meter drop tested | Operating Temp: | -10 °C to +50 °C |
| Battery: | Built-in Rechargeable Li-Polymer | Storage Temp: | -20 °C to +70 °C |
| Power Supply: | Micro USB interface, 5 VDC charger | Humidity: | 0% to 95%, non-condensing |



VeEX Inc.
2827 Lakeview Court
Fremont, CA 94538 USA
Tel: +1.510.651.0500
Fax: +1.510.651.0505
www.veexinc.com
customercare@veexinc.com

© 2019 VeEX Inc. All rights reserved.
VeEX is a registered trademark of VeEX Inc. The information contained in this document is accurate. However, we reserve the right to change any contents at any time without notice. We accept no responsibility for any errors or omissions. In case of discrepancy, the web version takes precedence over any printed literature.
D05-00-163P B00 2019/11