



# 2112217

**NEW**



## TC-P 201 008 RJ 45 F Test Connector for RJ-45, Flexible

<b>Max. Data rate</b>	1 Gbit/s
<b>Voltage</b>	25 VAC / 60 VDC
<b>Current</b>	1,5 A at 25°C
<b>R typ</b>	<20 mOhm
<b>Temperature</b>	-20°C...+75°C

Test connector (8 pole) for contacting RJ-45 Interfaces.  
Applications in network cables, Ethernet interfaces etc.

Features:

- Report on RJ-45 sockets
- Smooth contact to test item (front view)
- Easy connection to test system with RJ-45 cable (rear view)
- Up to 200.000 contact cycles

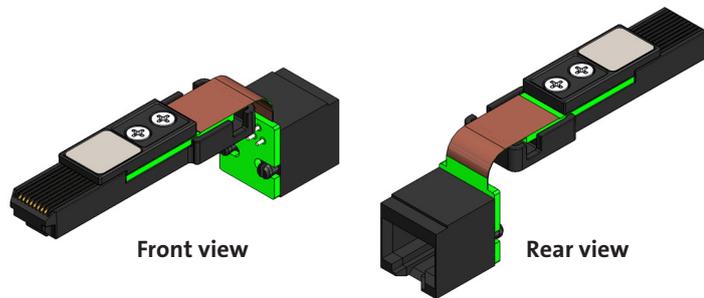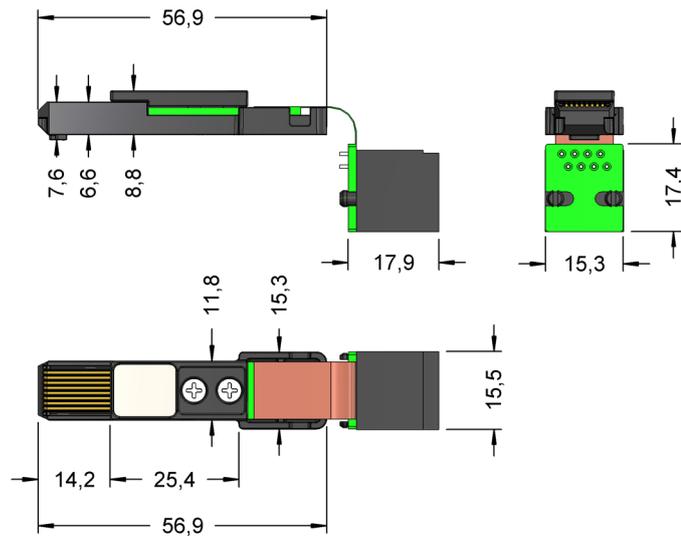


Series	Pole count	Type
e.g. TC-P 201	008 RJ	45 f
Holding device	Contact side	Version

# 2112201

## TC-H 201 Holding Device for Test Connector RJ-xx

Due to the centered seat of the test connector the holding device allows a parallel movement of the test connector and its connection.

- Floating-mounting of test connectors of  $\pm 0,4$  mm in x- and y-direction
- A torsion angle of up to  $1.8^\circ \pm 0.2^\circ$  is possible
- The holding device has a life cycle of more than 500.000 mechanical movements
- The holding device is fixed only by two screws at the upper and lower ends
- The test connector is attached to the holding device using only one locking screw

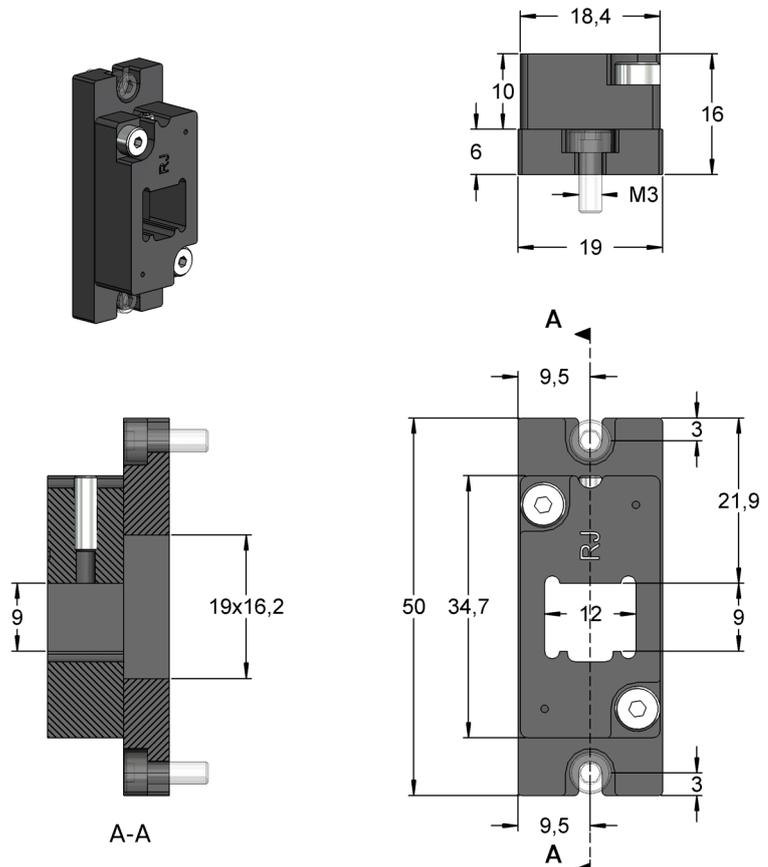

The threaded pin requires a hex wrench SW1,5.