



# 2112843

**NEW**

## TC-P 201 008 RJ 45 ffmv Test Connector for RJ-45, Flexible

<b>Max. Data rate</b>	1 Gbit/s
<b>Voltage</b>	25 VAC / 60 VDC
<b>Current</b>	1,5 A at 25°C
<b>R typ</b>	<20 mOhm
<b>Temperature</b>	-20°C...+75°C


Test connector (8 pole) for contacting RJ-45 Interfaces.

Applications in network cables, Ethernet interfaces etc.

Features:

- Report on RJ-45 sockets
- Smooth contact to test item
- Easy connection to test system with FPC connector
- Up to 200.000 contact cycles
- minimum installation size for good stackability
- Mounting via holder 2112201 or threaded pin with rubber buffer

Series	Pole count	Type
e.g. TC-P 201	008	RJ 45 ffmv
Holding device	Contact side	Version

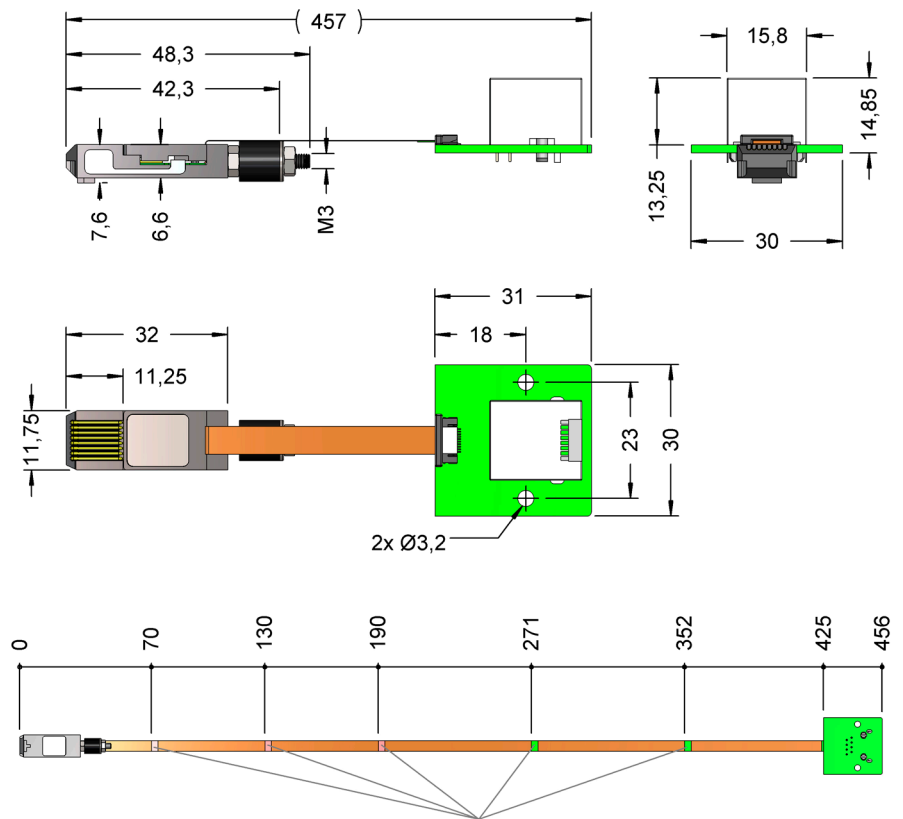

# 2112201

## TC-H 201 Holding Device for Test Connector RJ-xx

Due to the centered seat of the test connector the holding device allows a parallel movement of the test connector and its connection.

- Floating-mounting of test connectors of  $\pm 0,4$  mm in x- and y-direction
- A torsion angle of up to  $1.8^\circ \pm 0.2^\circ$  is possible
- The holding device has a life cycle of more than 500.000 mechanical movements
- The holding device is fixed only by two screws at the upper and lower ends
- The test connector is attached to the holding device using only one locking screw

The threaded pin requires a hex wrench SW1,5.

