

FX41xT

Selective PON Power Meter for G-PON and XGS-PON



10G Next-Gen and Legacy PON Optical Power Meter

Provides fast, simple, and precise measurement of G-PON and XGS-PON downstream signals. Miniature filters ensure each wavelength is measured accurately. The tester is well suited for installation, service verification, and troubleshooting of co-existent networks, including IEEE based E-PON and 10G-EPON deployments.



Key Features

- Downstream signal verification for G-PON and XGS-PON networks
- Simultaneous 1490/1577 nm signal level measurements
- Pass/Fail indication per PON Class or User thresholds
- Alkaline or rechargeable NiMH batteries with Auto- off
- Save over 2000 measurements with date and timestamp
- Save/display test results via NoApp™ QR code for mobile device transfer, post-processing, sharing, and upload
- Cloud-based NoApp™ service (included) allows for data augmentation via mobile phone or tablet. Secured and always up to date. No installation or updates required.
- Micro USB interface for 5V DC powering and battery charging
- High contrast backlit, monochrome display - visible outdoors and indoor with varying light conditions
- Splash and dust resistant keypad and chassis design
- Rugged polycarbonate chassis for demanding field conditions
- Fixed SC/APC connector interface with protective dust caps
- Visual Fault Locator (VFL) option
- Broadband Optical Power Meter (OPM) option


Key Specifications

- Wavelength-selective level measurements:
 - G-PON per ITU-T G.984.2
 - XGS-PON per ITU-T G.9807.1
 - EPON & 10G-EPON per IEEE 802.3av
- Calibrated PON wavelengths (Downstream):
 - 1490 nm (G-PON)
 - 1577 nm (XGS-PON)
- Narrow, Selective Spectral Passband*
 - Accurate measurements even in the presence of other wavelengths
 - 1490 nm (1480 to 1500 nm)
 - 1577 nm (1572 to 1582 nm)
- Display resolution: 0.1 dB
- Absolute Accuracy: ± 0.5 dB
- Communication Interface: Contact-less QR codes
- Battery Charging Interface: Micro-USB
- Battery Operating Time: ≥ 75 hours (with backlight)

*Meets ITU-T and IEEE PON passband specifications

Coexistent PON Services and Overlay Networks

Check PON service wavelengths to ensure customers are connected correctly and verify downstream levels meet threshold criteria.

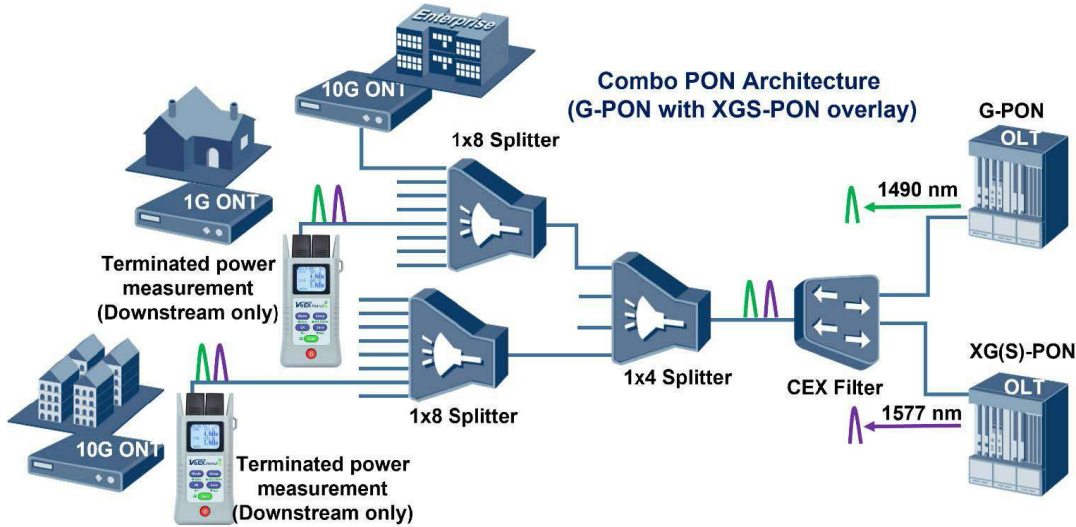

Test Result Saving and Transfer

A unique QR code method is used to save and transfer measurement results from the FX41xT power meter. Simply scan the QR code and process the test data directly on your mobile device. The NoApp™ feature eliminates the need to download specialized Android or iOS Apps to your mobile device – the QR code embeds all the necessary reporting, commenting, sharing, and uploading.*



VeSion R-Server® Workforce/Productivity System

A centralized server application designed for medium-to-large service providers facing the enormous challenge of managing and coordinating hundreds or even thousands of installations per day. The VeSion R-Server collects field test results for billing/record keeping purposes and simplifies inventory management. Used in conjunction with QR code test reporting function, this back-office application reduces customer call-backs and associated truck rolls, maximizing workforce efficiency and lowering operational costs.

*Patent pending

Optical Specifications¹

| FX41xT PON-T Power Meter | |
|---|--|
| Calibrated Wavelengths (nm) | 1490/1577 |
| Continuous Data Measurement Range (dBm) - OLT - 1490 nm - 1577 nm | -45 to +13 -45 to +13 |
| Spectral Passband (nm) ² - 1490 - 1577 | 1480 to 1500 1572 to 1582 |
| Isolation (dB) -1490 and 1577 | 40 |
| Power Measurement Accuracy, (dB) ^{3,4} | ±0.5 |
| Return Loss (dB) | 40 |
| Linearity (dB) | ±0.11 |
| Display Resolution (dB) | 0.1 |
| Display Result View | dBm and Pass/Fail (user defined thresholds) |
| Connector Interface (with dust cap protection) | Fixed SC/APC |
| Visual Fault Locator (VFL) (Optional) | |
| Emitter Type | Laser |
| Wavelength (nm) | 655 nm ±5 nm |
| Output Power (mW) ² | 1 mW |
| Laser Safety | Class 2 |
| Modulation | CW, 1 Hz, 2 Hz |
| Connector Type ⁵ | Universal 2.5 mm |
| Broadband Optical Power Meter (Optional) | |
| Wavelength Range (nm) | 800 to 1700 |
| Calibrated Wavelengths (nm) | 1310/1490/1550/1625/1650 Optional - CWDM ITU-T 694.2 Grid |
| Detector Type | InGaAs |
| Measurement Range (dBm) | -50 to +25 |
| Power Accuracy, % (dB) | ±5 (±0.22) |
| Linearity, % (dB) | ±2.5 (±0.11) |
| Display Resolution (dB) | 0.1 |
| Tone Detection (Hz) | 270/330/1000/2000 |
| Measurement Units | dBm, dB or Watt |
| Wave ID (Auto λ Detection) | Compatible with VeEX Light Sources only |
| Optical Adapters (Interchangeable) | SC, LC, FC, ST, Universal 2.5 or Universal 1.25 ferrule |

Notes

- 1. At room temperature
- 2. FWHM (typical)
- 3. Calibration conditions (-10 dBm)
- 4. Typical value
- 5. 2.5 mm to 1.25 mm FC to LC converter available

Ordering Information

| P/N | Description |
|-------------|---|
| Z06-99-255P | FX41xT PON Terminated Power Meter, 1G/10G - 1490/1577 nm with VFL |
| Z06-99-256P | FX41xT PON Terminated Power Meter, 1G/10G - 1490/1577 nm with High Power OPM, +25dBm to -50 dBm |

General Specifications

| | | | |
|---------------|---|-----------------|--|
| Size: | 129 x 61 x 38 mm (H x W x D) | Storage: | >2000 Single wavelength results >1000 Dual wavelength results |
| Weight: | 200 g (0.44 lbs.) (including batteries) | Display: | High contrast, transfective LCD with backlight |
| Construction: | Rugged, Polycarbonate chassis, 1 meter drop tested | Operating Temp: | -10 °C to +50 °C |
| Battery: | Two Alkaline AA or Rechargeable NiMH, 2150 mAh | Storage Temp: | -20 °C to +70 °C |
| Power Supply: | Micro USB interface, 5 VDC charger | Humidity: | 0% to 95%, non-condensing |
| Connectivity: | Micro USB | | |

Complementary Products for PON Verification and Troubleshooting

FL150 FaultScout® Multimeter



FL41 Optical Fault Locator



FX150+ PON OTDR



FX120 PON Analyzer



PON Technology Poster

VeEX The Verification Experts
Introduction to Passive Optical Networks (PON)
 Practical Reference Guide to Field Portable Measurements

The poster includes the following sections:

- Testing & Best Practices:** A table detailing various testing procedures and their best practices.
- Network Architectures:** Diagrams illustrating different PON architectures and their components.
- Wavelength Spectrum:** A chart showing the optical spectrum and the placement of various PON standards.
- Quick Reference to Standards:** A table listing key standards and their specifications.
- Splitter Losses:** A table providing loss values for different splitter configurations.
- Tap Losses:** A table providing loss values for different tap configurations.
- PON Optimized Fiber Test Equipment:** A list of recommended test equipment for PON networks.
- Performance Parameters (ITU-T & IEEE):** A table comparing performance metrics across different PON standards.

Do you like this solution?
 Please contact Heynen for distribution in BENELUX.