


Dimensions mm
 tolerances acc. to DIN ISO 2768-m
 Toleranzen gem. DIN ISO 2768-m

Isometric
 Scale 1:1
 Maßstab 1:1

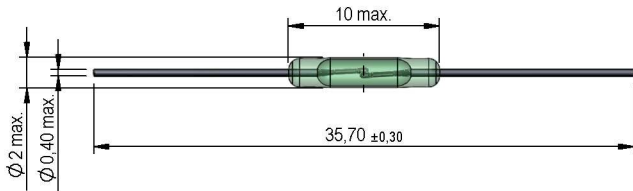

| Magnetic properties | Conditions | Min | Typ | Max | Unit |
|--------------------------------------|---|--------|-----|-----|------|
| Pull-In excitation (Reference value) | Reed switch unmodified measured in coil- "define operation" | 25 | | 30 | AT |
| Test equipment | Testing 100% | KMS-01 | | | |

| Contact data 87 | Conditions | Min | Typ | Max | Unit |
|----------------------------|---|---------|-----|-----|------|
| Contact-No. | | 87 | | | |
| Contact-form | | A | | | |
| Contact-material | Plating thicknesses are proprietary | Rhodium | | | |
| Contact rating | Any DC combination of V & A not to exceed their individual max.'s | | | 10 | W |
| Switching voltage | DC or Peak AC | | | 200 | V |
| Switching current | DC or Peak AC | | | 0,4 | A |
| Carry current | DC or Peak AC | | | 0,5 | A |
| Contact resistance static | Measured with 40% overdrive Start Value | | | 150 | mOhm |
| Contact resistance dynamic | Maximum value 1,5 ms after excitation Start Value | | | 200 | mOhm |
| Contact resistance dynamic | Difference value 1,5 ms after excitation | | | 20 | mOhm |
| Insulation resistance | RH <45 %, 100V - to all points | 1 | | | GOhm |
| Breakdown voltage | according to EN 60255-5 | 230 | | | VDC |
| Operate time incl. bounce | measured with 40% overdrive | | | 0,6 | ms |
| Release time | measured with no coil excitation | | | 0,1 | ms |
| Capacitance | @ 10 kHz across open switch | | 0,2 | | pF |

| Special Product Data | Conditions | Min | Typ | Max | Unit |
|-------------------------|------------|-----|-----|-----|------|
| Reach / RoHS conformity | | yes | | | |

| Environmental data | Conditions | Min | Typ | Max | Unit |
|-----------------------|------------------------------------|-----|-----|-----|------|
| Shock | 1/2 sine, duration 11ms, in 3 axis | | | 50 | g |
| Vibration | from 10 - 2000 Hz | | | 20 | g |
| Operating temperature | | -40 | | 130 | °C |
| Storage temperature | | -55 | | 130 | °C |
| Soldering temperature | wave soldering max. 5 sec. | | | 260 | °C |