


An EMF Monitoring Device to Alert Workers Near Antennas

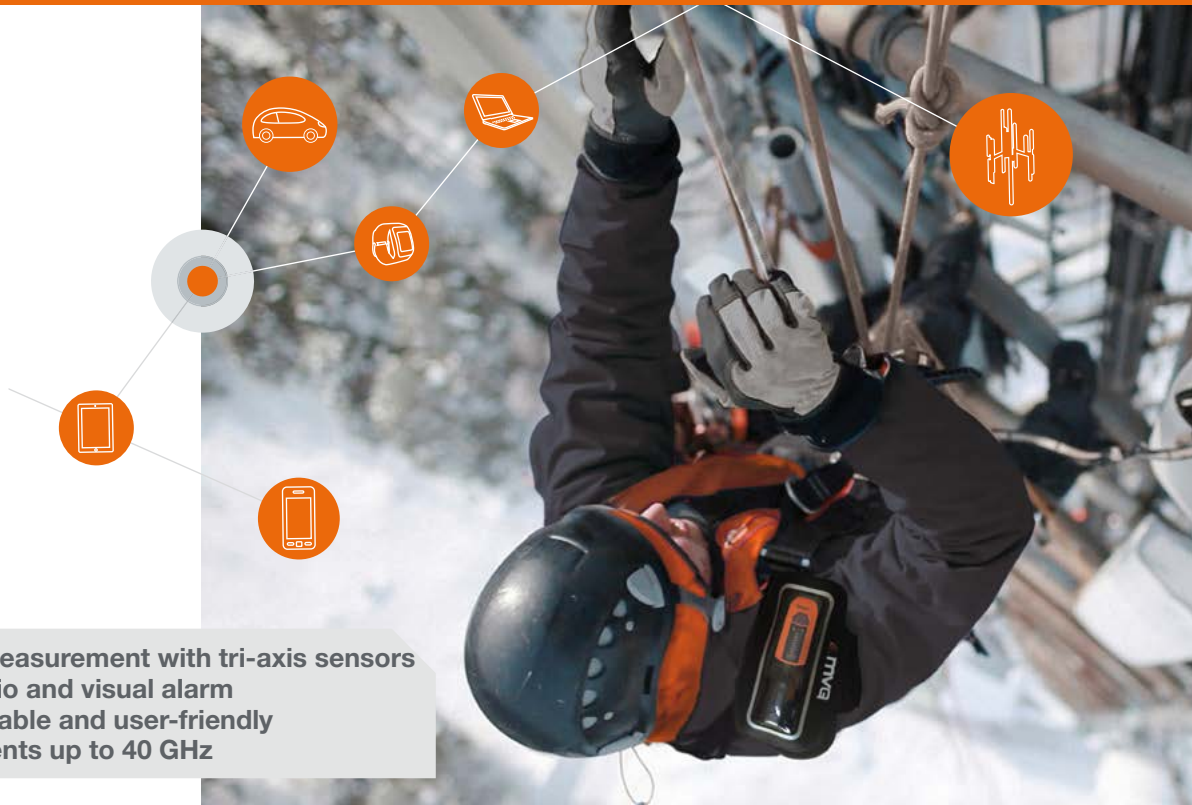

- Accurate measurement with tri-axis sensors
- Instant audio and visual alarm
- Robust, reliable and user-friendly
- Measurements up to 40 GHz

Main features

User profile

- Persons working near antennas including installation and maintenance workers, broadcast, PMR and mobile phone operators or regulatory body employees

Measurement capabilities

- Continuous monitoring of Electromagnetic Field levels with isotropic tri-axis E-field sensors
- EMF Level indicated by a LED color scale
- Audio and visual alarms triggered when EMF exceeds the reference level

Frequency bands

- 1 MHz – 40 GHz

Safety recommendations

- ICNIRP 2020
- Safety Code 6 2015
- FCC 96-326
- 2013/35/UE

Product Configuration

Equipment

- EME Guard XS 40 GHz
- MVG Case
- Wrist strap
- Lanyard
- Connecting adapter
- Armband
- 2 x 1.5 V Size N Alkaline batteries
- Instructions for use

Services

- Initial calibration
- Additional calibration
- Extended warranty

■ Included □ Optional

TECHNICAL CHARACTERISTICS

Probe	Isotropic 3-axes probe
Frequency range	1 MHz - 40 GHz
Lower detection limit	5 V/m
Upper detection limit	350 V/m

MEASUREMENT UNCERTAINTY

Frequency response	1-1000 MHz: +1/+5 dB
	1-3 GHz: +/-2.5 dB
	3-7 GHz: +2/+6 dB
	7-13 GHz: +6/+11 dB
	13-27 GHz: -7/+5.5 dB
27-40 GHz: -6/0 dB	
Axial isotropy	100 MHz : ± 0.5 dB
	2.6 GHz : ± 1 dB
	5.5 GHz : ± 1 dB

ALARM & CONFIGURATION

Visual alarm	7 LEDs
Audio alarm	2 tones
Low battery indicator	Orange flashing LED

MEASUREMENT CONFIGURATION

Measurement period	1 sec
--------------------	-------

CONDITIONS FOR USE

Temperature, humidity	-10°C to 50°C, 85% max humidity
Battery	2 x 1.5 V Size N Alkaline removable batteries
Battery life	> 1000 hours (> 50 days) ⁽¹⁾

MECHANICAL CHARACTERISTICS

Dimensions	132.5 x 48.5 x 28.7 mm (LxWxH) without connecting adapter
Weight	120 g with batteries

(1) If no alarm is triggered



Do you like this solution?
Please contact Heynen for distribution in BENELUX.



heynen@heynen.com
NL tel: +31 (0)485-550909
BE tel: +32 (0)11-600909
LUX tel: +352(0)26-910781