



Cable Test Sets

KPG 50kV
KPG 80kV
KPG 110kV
KPG 120kV

Digital
Meters

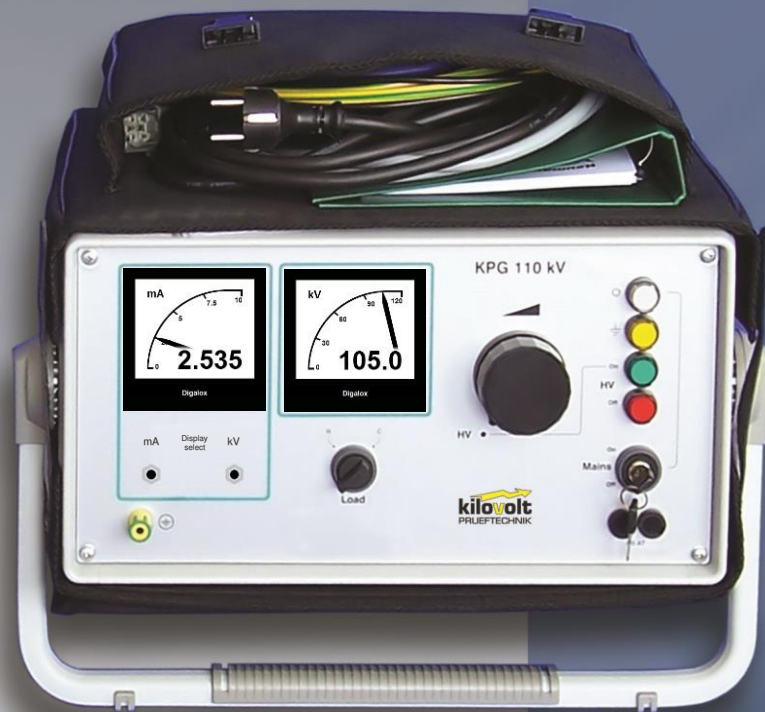


kilovolt
PRUEFTECHNIK

Specification

(Subject to change without further notice!)



Cable Test Sets KPG 50kV/80kV/110kV/120kV *with Digital Meters

The devices series KPG 50-120kV have been designed as Cable Test Sets for DC voltage testing of Medium Voltage Power Cables. There are 4 different versions (50kV/80kV/110kV/120kV) available. The devices are characterized by low weight and high output power. Thanks to the compact 2-part design, the units are easily portable and perfect to be used on site. The separate design of Operation- and High Voltage unit, a key switch, switch-on interlock and a protective ground circuit ensure maximum safety.

Field of application:

- Testing of newly installed cables and cable joints before commissioning
- Testing at re-commissioning of cable systems or High Voltage systems after maintenance and repair
- Regular preventive cable testing
- Testing of electrical equipment

Digital Meter version of:	KPG 50kV	KPG 80kV	KPG 110kV	KPG 120kV
Power supply	115/230 V ; 50/60 Hz (specify when ordering) ; max. 900 VA			
Output voltage infinitely adjustable	0 ... 50 kV DC negative polarity	0 ... 80 kV DC negative polarity	0 ... 110 kV DC negative polarity	0 ... 120 kV DC negative polarity
Rated output current at max. output voltage	6 mA	5 mA	4 mA	3.5 mA
Overcurrent trip	> 8 mA	> 7 mA	> 6 mA	> 5,5 mA
Voltage measurement	Digital meter (LCD) / range 0.0 ... 130.0 kV / resolution: 100 V / accuracy: 1 % display switchable between [needle + digital meter] and [graphical historic data]			
Current measurement	Digital meter (LCD) / range 0 ... 9.999 mA / resolution: 1 µA / accuracy: 1 % display switchable between [needle + digital meter] and [graphical historic data]			
Operating temperature Storage temperature	-20 °C ... +55 °C -25 °C ... +70 °C			
Weight Operation unit High Voltage unit	13 kg 17 kg	13 kg 18.5 kg	13 kg 20 kg	13 kg 20.5 kg
Dimensions (W x H x D) Operation unit High Voltage unit	37 x 20 x 28 cm 21 x 38 x 31 cm	37 x 20 x 28 cm 21 x 40 x 31 cm	37 x 20 x 28 cm 21 x 42 x 31 cm	37 x 20 x 28 cm 21 x 43 x 31 cm

Characteristics:

- Easy operation
- Robust construction, low weight
- Compact, easily portable by modular design
- Quick test setup on site
- Overcurrent trip
- Overvoltage protection
- Voltage measurement direct at HV output
- Protective ground circuit

Options:

- Transport case with trolley-function
- Customized HV cables (shielded or unshielded)
- Timer 1 ... 60 minutes

Scope of supply:

- Operation unit with protective bag and cable storage
- HV unit with HV outlet part
- HV-connecting cable, length 2m
- Connecting cable, HV unit to Operating unit, length 3m
- Ground cable for station ground, length 3m
- Ground cable for protective ground, length 3m
- Mains lead
- Ground- and Discharge rod, demountable,
with ground cable and bag
- Service pack
- User manual

MADE IN GERMANY 08/2016

Kilovolt Prueftechnik Chemnitz GmbH • Annaberger Str. 73 • 09111 Chemnitz • Germany

Tel.: +49 371 53032-10 • Fax: +49 371 53032-11

eMail: sales@kilovolt.biz • Internet: www.kilovolt.biz